

ERO-GUARD

MATERIALS DATA SHEET:

Product Name: EG- 2xRD

Manufacturer: Ero-Guard, Inc.

Contact: Brian F Dingels (612) 382-2783

Physical Description:

Size: Available in 16' and 8' widths and 112.5' and 562.5' lengths (Custom cuts are available upon request).

Plastic: 2 layers (Top and Bottom) of .8" x 1.0" opening, lightweight photodegradable polypropylene plastic. EG-2xRD also has a UV degrader added to it to break down the plastic at a more rapid rate.

Thread: 420 denier degradable split yarn, with a UV degrader added to it to match its longevity with that of the plastic.


Matrix: 100% Aspen wood fiber, 0.73 lbs/yd²

Packaging: All rolls are wrapped tightly with stretch wrap to protect the rolled erosion control product from the weather and elements.

Longevity: The Functional Longevity is approximately 60-90 days depending on sunlight, moisture and environmental conditions.

Recommended Applications: EG-2x RD is recommended for use on slopes up to 3:1 and in low flow channels.

Recommended Installation pattern: The leading edge is to be trenched into a 6" deep trench and the blanket is to be placed parallel to the anticipated water flow. When more than 1 blanket is required, they are to be overlapped 6" on all overlapping sides and tiled in a shingle type pattern as to not let the water underneath the blanket.

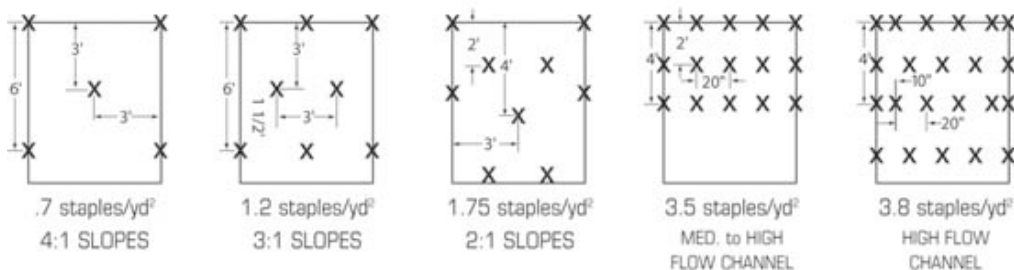

Your Leader In Erosion Control Blankets

412 Hwy 22 South · Mapleton, MN · 56065
Phone: (612)382-2783 · Fax: (507)524-3859