

ERO-GUARD

MATERIALS DATA SHEET:

Product Name: EG- 2X

Manufacturer: Ero-Guard, Inc.

Contact: Brian F Dingels (612) 382-2783

Physical Description:

Size: Available in 16', 8', and 4" widths; varied lengths

Netting: 2 Layers (top and bottom) of .8" x 1.0" opening, lightweight photodegradable, green polypropylene plastic netting.

Thread: 600 denier degradable split yarn


Matrix: 100% Aspen wood fiber, .73 lbs/yd²

Packaging: All rolls are wrapped tightly with stretch wrap to protect the rolled erosion control product from the weather and elements.

Longevity: The Functional Longevity is approximately 1 growing season depending on sunlight, moisture and environmental conditions.

Recommended Applications: EG-2x is recommended for use on slopes up to 3:1 and in low flow channels.

Recommended Installation pattern: The leading edge is to be trenched into a 6" deep trench and the blanket is to be placed parallel to the anticipated water flow. When more than 1 blanket is required, they are to be overlapped 6" on all overlapping sides and tiled in a shingle type pattern as to not let the water underneath the blanket.

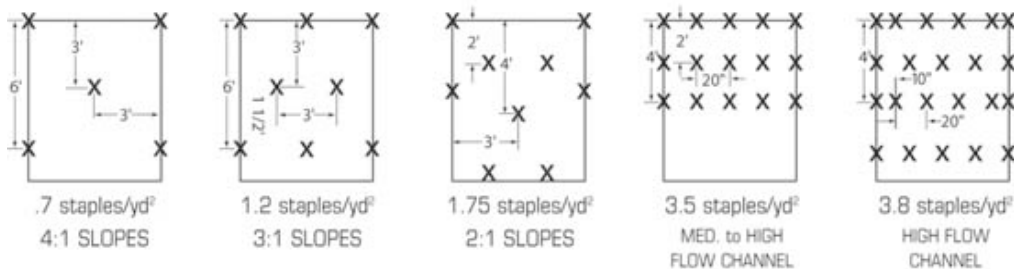

Your Leader In Erosion Control Blankets

412 Hwy 22 South · Mapleton, MN · 56065
Phone: (612) 382-2783 · Fax: (651) 917-0111